



Umschalter, 3-/4-polig, 1-0-2, NETZ-0-NOTSTROM

Verteilereinbau 45 mm Normausschnitt





	Abmessungen				Dauerstrom (I _v /I _{th})	Schaltleistung AC-23B (A)	Frontschild	ab Lager lieferbar	Artikelnummer	ab Lager lieferbar
	A	B	G	L						
3-polig	43,7	45	84	64	25 A	7,5 kW	KG20A K900 VE2	●	KG20A K900 VE2, F437	●
					32 A	11 kW	KG32A K900 VE2	●	KG32A K900 VE2, F437	●
	150,4	45	100	62,5	40 A	15 kW	KG41B K900 VE2	●	KG41B K900 VE2, F437	●
					63 A	22 kW	KG64B K900 VE2	●	KG64B K900 VE2, F437	●
	70	45	140	76,2	80 A	30 kW	KG80 K900 VE2	●	KG80 K900 VE2, F437	●
				100 A	37 kW	KG100 K900 VE2	●	KG100 K900 VE2, F437	●	
				125 A	45 kW	KG105 K900 VE2	●	KG105 K900 VE2, F437	●	
4-polig	43,7	45	111	64	25 A	7,5 kW	KG20A K950 VE2	●	KG20A K950 VE2, F437	●
					32 A	11 kW	KG32A K950 VE2	●	KG32A K950 VE2, F437	●
	105,4	45	132	62,5	40 A	15 kW	KG41B K950 VE2	●	KG41B K950 VE2, F437	●
					63 A	22 kW	KG64B K950 VE2	●	KG64B K950 VE2, F437	●
	70	45	184	76,2	80 A	30 kW	KG80 K950 VE2	●	KG80 K950 VE2, F437	●
				100 A	37 kW	KG100 K950 VE2	●	KG100 K950 VE2, F437	●	
				125 A	45 kW	KG105 K950 VE2	●	KG105 K950 VE2, F437	●	



3-/4-polig

Lasttrennschalter


Fronteinbau 4-Loch-Befestigung, IP66

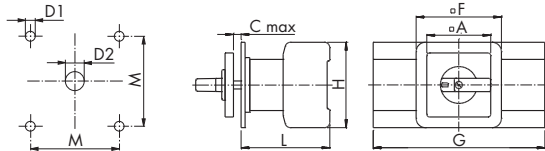



Dauerstrom (I _v /I _{th})	Schaltleistung AC-23B (A)	Frontschild	Artikelnummer	ab Lager lieferbar
4-polig 3 x 400 V				
25 A	7,5 kW	48 x 48	KG20A K950 -600 E, F437	
		64 x 64	KG20B K950 -600 E, F437	
32 A	11 kW	48 x 48	KG32A K950 -600 E, F437	
		64 x 64	KG32B K950 -600 E, F437	●
40 A	15 kW	64 x 64	KG41B K950 -600 E, F437	
		64 x 64	KG64B K950 -600 E, F437	●
63 A	22 kW	64 x 64	KG80 K950 -600 E, F437	
		64 x 64	KG100 K950 -600 E, F437	
80 A	30 kW	64 x 64	KG125 K950 -600 E, F437	
100 A	37 kW	64 x 64	KG160 K950 -600 E, F437	
125 A	45 kW	88 x 88		
160 A	55 kW	88 x 88		

	Schalter							Lochbild	
	A	C	F	G	L	H	M	D1	D2
KG20A, KG32A	48	4	48	111	61,3	54	36	5	10
KG20B, KG32B	64	4	64	111	61,3	54	48	5	10
KG41B, KG64B	64	4	64	132	66,5	64	48	5	10
KG80, KG100	64	4	70	184	81,8	80	48	5	10
KG125, KG160	88	5,5	300	98	108	68	6	13	


Verteilereinbau mit Achsverlängerung, IP 40




Frontschild
KG20B-KG100



Bodenplatte
KG20B-KG100



KG125, KG160



Dauerstrom (I _v /I _{th})	Schaltleistung AC-23B (A)	Frontschild	Artikelnummer
4-polig 3 x 400 V			
25 A	7,5 kW	64 x 64	KG20B T904/57 VE
32 A	11 kW	64 x 64	KG32B T904/57 VE
40 A	15 kW	64 x 64	KG41B T904/57 VE
63 A	22 kW	64 x 64	KG64B T904/57 VE
80 A	30 kW	64 x 64	KG80 T904/57 VE
100 A	37 kW	64 x 64	KG100 T904/57 VE
125 A	45 kW	88 x 88	KG125 T904/57 VE
160 A	55 kW	88 x 88	KG160 T904/57 VE

	Schalter						Lochbild			
	A	G	L	H	D3	E1	F1	F2	F3	F4
KG20B, KG32B	64	111	190	54	4,1	60	32	10	23,5	45,5
KG41B, KG64B	64	132	190	64	4,1	70	37,5	12,5	28,5	53,5
KG80, KG100	64	184	380 ²	80	5,2	90	47,5	22,5	44,5	69,5
KG125, KG160	88	300	450	108	6	76	59-61	59-61		

¹ KG64B = 330, ² KG100 = 450

